

# F-50

## DYNAMIC WIRED MICROPHONE

# NTS



### HIGH PERFORMANCE DYNAMIC WIRED MICROPHONE

Impedance (at 1 KHz)	250Ω
Sensitivity (0dB=1v/pa at 1KHz)	-51dB +/- 3dB
Pattern	Unidirectional
Frequency response	50Hz ~ 16KHz

### PROFESSIONAL DYNAMIC MICROPHONE FOR F-50 VOCAL & MUSIC INSTRUMENT


#### TECHNICAL SPECIFICATION

..... INSTRUCTION .....

Take the microphone to the best distance (5-10 cm. from mouth) so that avoid the noise

..... CAUTION .....

Keep far away between the microphone and loudspeaker. Don't strike the microphone, avoid to damage the parts of microphone, Don't put the microphone on high temperature and moisture place.

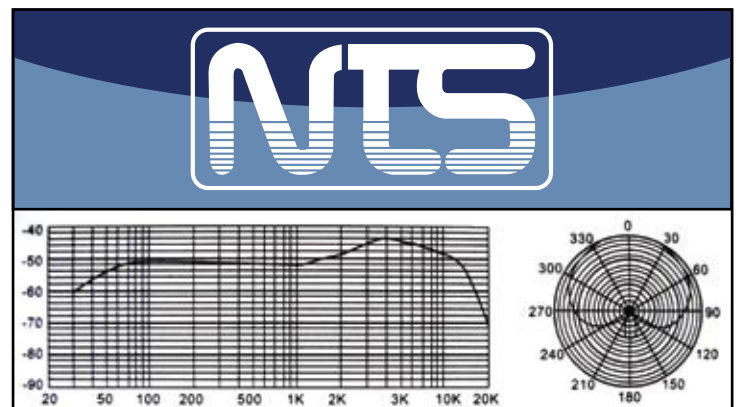

<http://www.nts-solution.com>

All features & specifications are subjected to change without notice.

**NTS** บริษัท เอ็นทีเอส อิเล็กทรอนิกส์ โซลูชั่น จำกัด  
NTS Electronic Solution Co., Ltd.

1439-1441 ถนนเจริญนคร แขวงบางลำภูล่าง เขตคลองสาน กรุงเทพฯ 10600

โทรศัพท์: 0-2438-7023-4, 0-2437-7639 โทรสาร: 0-2437-1897

<http://www.nts-solution.com> E-mail: [nts@nts-solution.com](mailto:nts@nts-solution.com)

1439-1441 Charoennakorn Rd. Banglumpoolang Klongsan Bangkok 10600, Thailand

Tel: (+66-2) 438-7023-4, (+66-2) 437-7639 Fax: (+66-2) 437-1897